

WELDER TRACTORS SP-CAT D6M XL



SPECIFICATIONS



ENGINE

Type	CATERPILLAR 3116 Turbocharge
Net flywheel power	140 HP
Governed speed	2,200 rpm



TRANSMISSION

Type	Power shift
Brakes	Oil cooled
1st gear	2.1 miles/h - 3.4 km/h
2nd gear	3.7 miles/h - 6 km/h
3rd gear	6.4 miles/h - 10.3 km/h



TRACK FRAME

Number of bottom rollers	7 per side
Number of carrying rollers	40 per side
Length of track on the ground	2,550 mm - 100 in
Standard shoes width	600 mm - 24 in
Gauge	1,890 mm - 74 in
Ground contact area	4,743 in ² - 3.06 m ²
Pressure on the ground	6.99 p.s.i. - 0.49 kg/cm ²



POWER TAKE-OFF

Type	Independent
Control	Power-shift



WELDER PACKAGES

Type welders (4)	Lincoln 400 amp
Type alternator	Marathon 125 Kw
Electrical outlets	220 and 110 V
Air compressor	Quincy 350/390
Displacement	27 CFM
Air tank	120 gallons
Powered by	10-20 HP electric motor



ELECTRIC SYSTEM

Operating voltage	24 V
Maintenance free supplied batteries	2
Capacity (total)	160 Ah
Starter capacity	7.5 Kw
Alternator	55 A



FLUID CAPACITIES

Fuel tank	311 liters - 82.2 U.S. gal
-----------	----------------------------



HYDRAULIC BOOM

Type	Hiab, Maxi-lift, Ferrari or custom fabricated
Operator controls	All are hydraulically controlled from cab
Maximum lifting capacity	5,000 lbs - 7,000 lbs
Optional	
Type	Hiab 077
Max lifting capacity	5,952 lb - 2,700 kg (@ 2.3 m - 90.5 in)
Also available:	Manual Jib Boom



GENERATOR

Type	Marathon generator (double bearing) 125 KW
Arrangement	Belt-driven; off of PTO
Alternate arrangement	Hydraulically driven generator
Voltage	110/220 variable outlets for grinding or powers source
Options	Can be adapted to 50/60 hertz




COMPRESSOR

Type	Quincy 350
Cubic feet per minute	28 CFM
Operating range	250 p.s.i.
Tank capacity	120 gal/liters
Options	Can be electrical or hydraulic driven

DIMENSIONS

OPERATING WEIGHT 15,050 kg - 33,200 lb

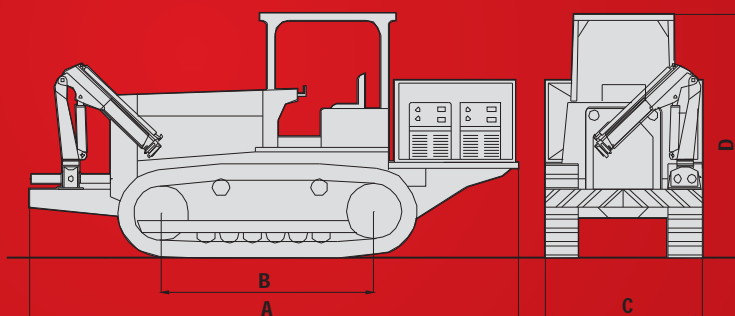

A	5.95 m / 19.5'
B	2.55 m / 8.3'
C	2.49 m / 8.16'
D	3.02 m / 9.9'

CONTACT INFORMATION & DISCLAIMER

Main office – General inquiries SUPERIOR Manufacturing

16031 East Freeway
Channelview, TX 77530
U.S.A.
Phone 281.457.4400
Fax 281.452.5455
U.S. Toll Free 800.383.2666
Intl. Toll Free 800.9675.3948
pipeline@wwmach.com
www.worldwidemachinery.com

Italy office SUPERIOR Manufacturing

Via Roma, 18
San Pancrazio, Parma
Italy

Evan Greenberg

Vice-President of Intl. Operations

Worldwide offices Europe and Australia

Juergen Hafemann
Phone +49.0.231.963.3073 Germany
Phone +61.0.400.144.432 Australia
pipelinece@wwmach.com

India

Abhishek Bhotika
Phone +91.11.414.59230
pipelineind@wwmach.com

Africa

Evan Greenberg
Phone +1.281.452.5800
pipeline@wwmach.com

Russia, China and the Middle East

Sergio Braoude
Phone +39.349.198.1281 Italy
Phone +7.495.507.4827 Russia
fsupipeline@wwmach.com

Latin America

Salvador Villasana
Phone +52.81.8.394.0160
pipelinesa@wwmach.com

North America

Rick Layh
Phone +1.281.457.4400
pipelinena@wwmach.com



DISCLAIMER

The information contained in this brochure is intended to be of a general nature only. The SUPERIOR Manufacturing Company may at any time and from time to time, for technical or other necessary reasons, modify any of the details or specifications of the product described in this brochure. Illustrations do not necessarily show products in standard conditions. The dimensions, weights and capacities shown herein, as well as any conversion data used, are approximate only and are subject to variations within normal manufacturing techniques.